



BC20 | BC30 | BC40 | BC60


Hardmount Washer-Extractor

FEATURES

- Rigid mounted, medium spin, 200G factor
- Stainless steel top and front panel Stainless steel drum and tub
- High capacity water inlets
- Large drain valve
- Large door opening for easy loading & unloading
- Industry-leading flexible water level settings
- Patented Fill and Drain leak detection saves water
- Lighter, computer-optimized frame Designed to reduce sound and vibration levels

CONTROLS OPTIONS

- Available with EVOLIS Touch for Vend. 7", full color touch screen display with swipe function: very intuitive for users User-friendly screen with operating
- Instructions built in as part of the control Complete control content available in 34 languages
- Wireless communication enabling programming & firmware updates through cloud
- Automated service reminders remind users to maintenance tasks
- IPSO Connect: interactive dashboard offers operational performance info on mobile device
- 15 easy-to-use washer cycle modifier

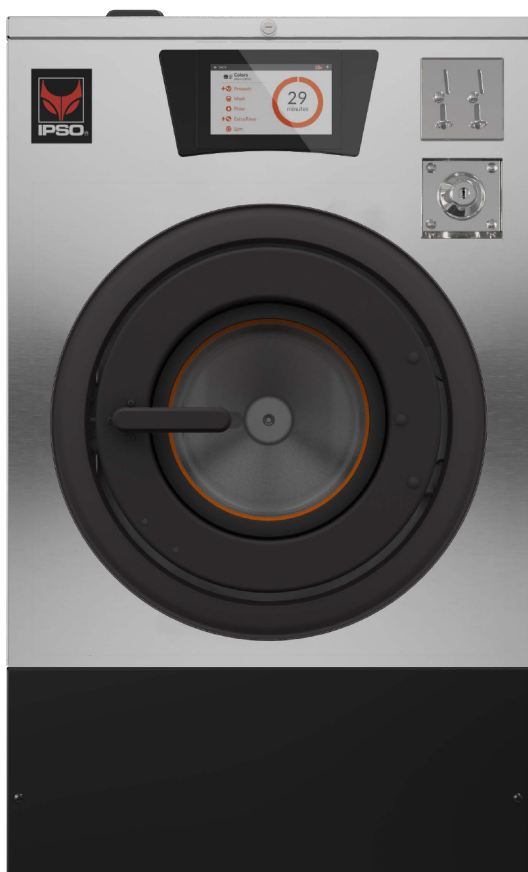

Robust Design



Large Drain Valve



Large Door Opening



Low Water Consumption

YOUR SMART LAUNDRY PARTNER

Distributor by : **Retrology** AUTHORIZED DISTRIBUTOR No.1 IN INDONESIA

+628111 687746 +628111 867746
sales@ipsoindonesia.com
www.ipsoindonesia.com

		BC20	BC30	BC40	BC60
Control Option		EVOLIS Touch	EVOLIS Touch	EVOLIS Touch	EVOLIS Touch
Capacity	kg (lb)	9.1 (20)	13.1 (30)	18.1 (40)	27.2 (60)
Overall Width	mm (in)	660 (26)	737 (29)	778 (30.6)	865 (34.1)
Overall Depth	mm (in)	784 (30.9)	896 (35.3)	1073 (42.3)	1135 (44.7)
Overall Height	mm (in)	1092 (43)	1143 (45)	1199 (47.2)	1267 (49.9)
Cylinder Diameter	mm (in)	533 (21)	610 (24)	668 (26.3)	762 (30)
Cylinder Depth	mm (in)	350 (13.8)	406 (16)	515 (20.3)	559 (22)
Cylinder Volume	l (cu. ft.)	79.3 (2.8)	119 (4.2)	178 (6.3)	255 (9.0)
Door Opening Size	mm (in)	295 (11.6)	363 (14.3)	414 (16.3)	414 (16.3)
Door Bottom to Floor	mm (in)	365 (14.4)	356 (14)	370 (14.6)	379 (14.9)
Water Inlet Connection	mm (in)	2 @ 19 (0,75)	2 @ 19 (0,75)	2 @ 19 (0,75)	4 @ 19 (0,75)
Drain Diameter	mm (in)	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)
Drain Height to Floor	mm (in)	99 (3,9)	109 (4,3)	114 (4,5)	124 (4,9)
Total #of Speeds		9	9	9	9
CYLINDER SPEEDS	[RPM (G-FORCE)] Ultra High	819(200)	766(200)	733(200)	686(200)
VOLTAGE WIRES/CIRCUIT BREAKER					
FLA120/60/1		15.IX	N/A	20 – 15	N/A
200-208/220-240/50/60/3/1/3		15 – 4 (1 Ph) 15 – 3 (3 Ph)	15 – 7 (1 Ph) 15 – 4 (3 Ph)	15 – 7 (1 Ph) 15 – 4 (3 Ph)	15 – 11 (1 Ph) 15 – 7 (3 Ph)
200-208/220- 240/50/60/3/3		30 – 22	30-22	50 – 41	50 – 41
440-480/50/60/3/3		15 – 2	15 – 3	15 – 3	15 – 4
380-415/50/60/3/3		15 – 4	15 – 4	15 – 5	15 – 6
SHIPPING DIMENSIONS					
AP-PROX.	mm (in)				
Width	mm (in)	711 (28)	800 (31.5)	826 (32.5)	953 (37.5)
Depth	mm (in)	859 (33.8)	937 (38.3)	1105 (43.5)	1191 (46.9)
Height	mm (in)	1255 (49.4)	1303 (51.3)	1361 (53.6)	1430 (56.3)
Motor Power Consumption	[kW (HP)]	0.75 (1)	0.75 (1)	1.5 (2)	2.2 (3)
Net Weight	kg (lb)	154 (340)	200 (440)	245 (540)	308 (680)
Shipping Weight	kg (lb)	172 (380)	218 (480)	263 (580)	327 (720)
Slat Crate Shipping Weight	kg (lb)	209 (460)	263 (580)	308 (680)	381 (840)
Agency Approvals		CSA/UL/IEC/KTL	CSA/UL/IEC/KTLL	CSA/UL/IEC/KTL	CSA/UL/IEC/KTL

	Height	Width	Depth
BC20	1092	660	784
BC30	1143	737	896
BC40	1199	778	1073
BC60	1267	866	1135

All measurements in mm.

